

Firmware Update

GPM-8300 Series



FW Update Manual

This firmware update manual contains proprietary information, which is protected by copyrights. All rights are reserved. No part of this manual may be photocopied, reproduced or translated to another language without prior written consent of Good Will company.

The information in this manual was correct at the time of printing. However, Good Will continues to improve products and reserves the rights to change specification, equipment, and maintenance procedures at any time without notice.

Good Will Instrument Co., Ltd.
No. 7-1, Jhongsing Rd., Tucheng Dist., New Taipei City 236, Taiwan.



ISO-9001 CERTIFIED MANUFACTURER

GW INSTEK

Update Procedure

The firmware update for GPM-8300 series requires an USB 2.0 flash disk and the corresponding “D_IMAGE.bin” file beforehand.



Note


The “D_IMAGE.bin”, which is in different filename by default, needs to be manually renamed by user for firmware update. For instance, rename the original “GPM-8310 PHY_V1.00_20200615_D_IMAGE.bin” to the exactly “D_IMAGE.bin”.

Update
procedure –
GPM-8310 for
example

1. Power off GPM-8310 unit.
2. Plug in USB flash disk after copying the “D_IMAGE.bin” file to the boot directory of the USB flash disk.
3. Press both F1 key and Key Lock key simultaneously.



4. Power on GPM-8310 unit and the BootLoader Mode is shown for firmware update automatically.

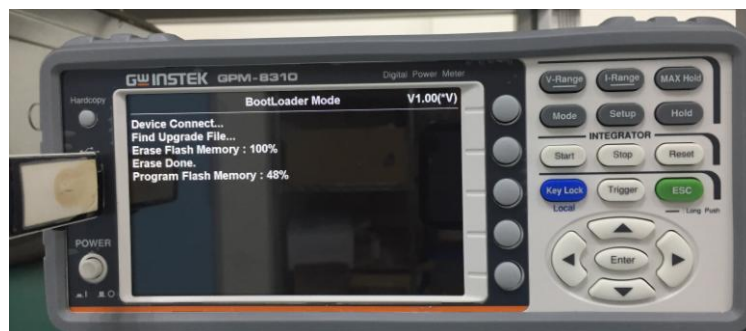

5. After firmware update, it is suggested to restart GPM-8310 unit to ensure every function is upgraded to the latest version.